

DECLARATION OF PERFORMANCE N. AZT-13004-REV


1. Single identification code of the product type
Type, batch or serial number or of any other element that allows the identification of the product **DRY-PRESSED CERAMIC TILES,
WITH ABSORPTION OF WATER $E_b > 10\%$**
2. Uses or foreseen uses
For indoor walls
3. Name or registered manufacturer's trademark and manufacturer's address
**AZTECA PRODUCTS&SERVICES, S.L.
Ctra. Castellón-Alcora, Km 19'7
12110 Alcora (Spain)**
4. System or systems of evaluation and verification of constancy of features
System 4
5. Name and number of laboratory notified, if applicable
Not applicable
6. Performance declared

Essential characteristics	Performances	Harmonised technical specification
Reaction to fire	A1	EN 14411:2012
Emission of hazardous substances:		
- Cadmium	NPD	
- Lead	NPD	
Breaking strength	NPD	
Slippage:	NPD	
Tactile properties	NPD	
Adhesion:		
Cementitious adhesive type C2	$> 0,5 \text{ N/mm}^2$	
Thermal Shock Resistance	Complies	
Durability for:		
- indoor uses:	Complies	
- outdoor uses: frost resistance	NPD	

The performances of the product identified in point 1 are in conformity with the performances declared in point 6.

This declaration of performance is issued under the sole responsibility of the manufacturer indicated in point 3.

Signed by and on behalf of the manufacturer by:

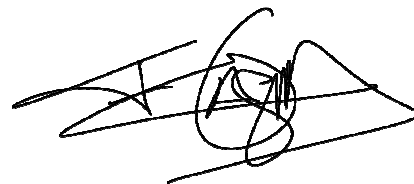

Félix Gascón Nogueroles
Marketing & Innovation Manager
Alcora, July 1st, 2013

**DECLARATION OF PERFORMANCE
N. AZT-13003-PGR**

1. Single identification code of the product type
Type, batch or serial number or of any other element that allows the identification of the product

**DRY-PRESSED CERAMIC TILES,
WITH ABSORPTION OF WATER $3\% < E_b \leq 6\%$**

2. Uses or foreseen uses

For indoor floors

3. Name or registered manufacturer's trademark and manufacturer's address

**AZTECA PRODUCTS&SERVICES, S.L.
Ctra. Castellón-Alcora, Km 19'7
12110 Alcora (Spain)**

4. System or systems of evaluation and verification of constancy of features

System 4

5. Name and number of laboratory notified, if applicable

Not applicable


6. Performance declared

Essential characteristics	Performances	Harmonised technical specification
Reaction to fire	A1 _{FL} /A1	EN 14411:2012
Emission of hazardous substances:		
- Cadmium	NPD	
- Lead	NPD	
Breaking strength	>1100 N	
Slippage:	NPD	
Tactile properties	NPD	
Adhesion:		
Cementitious adhesive type C2	>0,5 N/mm ²	
Thermal Shock Resistance	Complies	
Durability for:		
- indoor uses:	Complies	
- outdoor uses: frost resistance	NPD	

The performances of the product identified in point 1 are in conformity with the performances declared in point 6.

This declaration of performance is issued under the sole responsibility of the manufacturer indicated in point 3.

Signed by and on behalf of the manufacturer by:

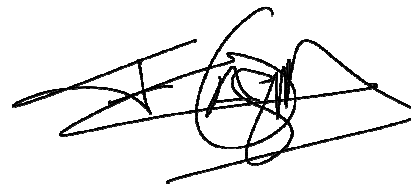

Félix Gascón Nogueroles
Marketing & Innovation Manager
Alcora, July 1st, 2013

**DECLARATION OF PERFORMANCE
N. AZT-13002-PORB**


1. Single identification code of the product type
Type, batch or serial number or of any other element that allows the identification of the product **DRY-PRESSED CERAMIC TILES,
WITH ABSORPTION OF WATER 0,5% $E_b \leq 3\%$**
2. Uses or foreseen uses
For indoor floors and outdoor and indoor walls
3. Name or registered manufacturer's trademark and manufacturer's address
**AZTECA PRODUCTS&SERVICES, S.L.
Ctra. Castellón-Alcora, Km 19'7
12110 Alcora (Spain)**
4. System or systems of evaluation and verification of constancy of features
System 4
5. Name and number of laboratory notified, if applicable
Not applicable
6. Performance declared

Essential characteristics	Performances	Harmonised technical specification
Reaction to fire	A1 _{FL} /A1	EN 14411:2012
Emission of hazardous substances:		
- Cadmium	NPD	
- Lead	NPD	
Breaking strength	>1100 N	
Slippage:	NPD	
Tactile properties	NPD	
Adhesion:		
Cementitious adhesive type C2	> 1 N/mm ²	
Thermal Shock Resistance	Complies	
Durability for:		
- indoor uses:	Complies	
- outdoor uses: frost resistance	Complies	

The performances of the product identified in point 1 are in conformity with the performances declared in point 6.

This declaration of performance is issued under the sole responsibility of the manufacturer indicated in point 3.

Signed by and on behalf of the manufacturer by:

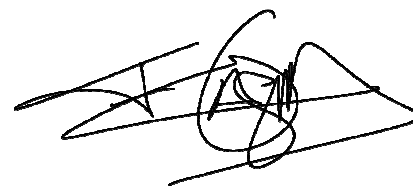

Félix Gascón Nogueroles
Marketing & Innovation Manager
Alcora, July 1st, 2013

**DECLARATION OF PERFORMANCE
N. AZT-13001-PORM**

1. Single identification code of the product type
Type, batch or serial number or of any other element that allows the identification of the product

**DRY-PRESSED CERAMIC TILES,
WITH ABSORPTION OF WATER $E_b \leq 0.5\%$**

2. Uses or foreseen uses

For indoor and outdoor floors and walls

3. Name or registered manufacturer's trademark and manufacturer's address

**AZTECA PRODUCTS&SERVICES, S.L.
Ctra. Castellón-Alcora, Km 19'7
12110 Alcora (Spain)**

4. System or systems of evaluation and verification of constancy of features

System 4

5. Name and number of laboratory notified, if applicable

Not applicable


6. Performance declared

Essential characteristics	Performances	Harmonised technical specification
Reaction to fire	A1 _{FL} /A1	EN 14411:2012
Emission of hazardous substances:		
- Cadmium	NPD	
- Lead	NPD	
Breaking strength	>1300 N	
Slippage:	NPD	
Tactile properties	NPD	
Adhesion:		
Cementitious adhesive type C2	> 1 N/mm ²	
Thermal Shock Resistance	Complies	
Durability for:		
- indoor uses:	Complies	
- outdoor uses: frost resistance	Complies	

The performances of the product identified in point 1 are in conformity with the performances declared in point 6.

This declaration of performance is issued under the sole responsibility of the manufacturer indicated in point 3.

Signed by and on behalf of the manufacturer by:

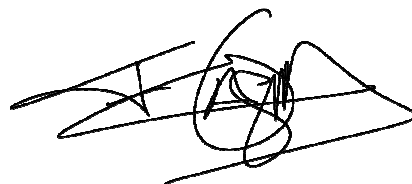

Félix Gascón Nogueroles
Marketing & Innovation Manager
Alcora, July 1st, 2013

DECLARATION OF PERFORMANCE N. AZT-13005-PIEN


1. Single identification code of the product type
Type, batch or serial number or of any other element that allows the identification of the product **STONE TILES WITH NATURAL FINISH**
2. Uses or foreseen uses
For indoor and outdoor floors and walls
3. Name or registered manufacturer's trademark and manufacturer's address
**AZTECA PRODUCTS&SERVICES, S.L.
Ctra. Castellón-Alcora, Km 19'7
12110 Alcora (Spain)**
4. System or systems of evaluation and verification of constancy of features
System 4
5. Name and number of laboratory notified, if applicable
Notapplicable
6. Performance declared

Essential characteristics	Performances	Harmonised technical specification
Petrographic name	According to model	EN 1341:2002 EN 12058:2005
Frost resistance		
Average value	>18 MPa	
Standard deviation	4-5.5 MPa	
Minimum value expected	>11 MPa	
Bending strength		
Average value	>18 MPa	
Standard deviation	3-8 MPa	
Minimum value expected	>13 MPa	
Abrasion resistance		
Average value	>29 mm	
Maximum value expected	>27 mm	
Slipping resistance		
USRVdry	>45 (Class 3)	
USRVwet	>45 (Class 3)	

The performances of the product identified in point 1 are in conformity with the performances declared in point 6.

This declaration of performance is issued under the sole responsibility of the manufacturer indicated in point 3.

Signed by and on behalf of the manufacturer by:

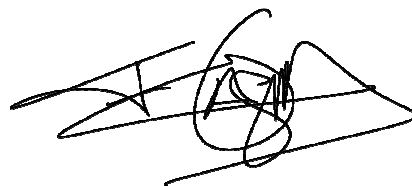

Félix Gascón Nogueroles
Marketing & Innovation Manager
Alcora, July 1st, 2013

**DECLARATION OF PERFORMANCE
N. AZT-13006-PIEP**


1. Single identification code of the product type
Type, batch or serial number or of any other element that allows the identification of the product **NATURAL STONE TILES WITH POLISHED FINISH**
2. Uses or foreseen uses
For indoor and outdoor floors and walls
3. Name or registered manufacturer's trademark and manufacturer's address
**AZTECA PRODUCTS&SERVICES, S.L.
Ctra. Castellón-Alcora, Km 19'7
12110 Alcora (Spain)**
4. System or systems of evaluation and verification of constancy of features
System 4
5. Name and number of laboratory notified, if applicable
Notapplicable
6. Performance declared

Essential characteristics	Performances	Harmonised technical specification
Petrographic name	According to model	EN 1469:2005 EN 12058:2005
Frost resistance		
Average value	>17 MPa	
Standard deviation	5-6 MPa	
Minimum value expected	>8 MPa	
Bending strength		
Average value	>23 MPa	
Standard deviation	7-8 MPa	
Minimum value expected	>12 MPa	
Abrasion resistance		
Average value	>35 mm	
Maximum value expected	>50 mm	
Slipping resistance		
USRVdry	>45 (Class 3)	
USRVwet	<45 (Class 2)	

The performances of the product identified in point 1 are in conformity with the performances declared in point 6.

This declaration of performance is issued under the sole responsibility of the manufacturer indicated in point 3.

Signed by and on behalf of the manufacturer by:

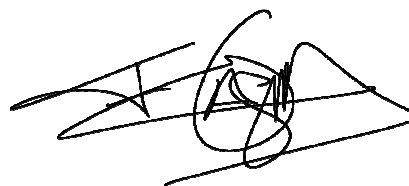

Félix Gascón Nogueroles
Marketing & Innovation Manager
Alcora, July 1st, 2013